


1 2 3 4 5 6 7 8 9 10 11 12 13 14

A

Steckermaßtoleranzen: ±1 mm
 Plug size tolerances: ±1 mm





USB B plug



B

L


C

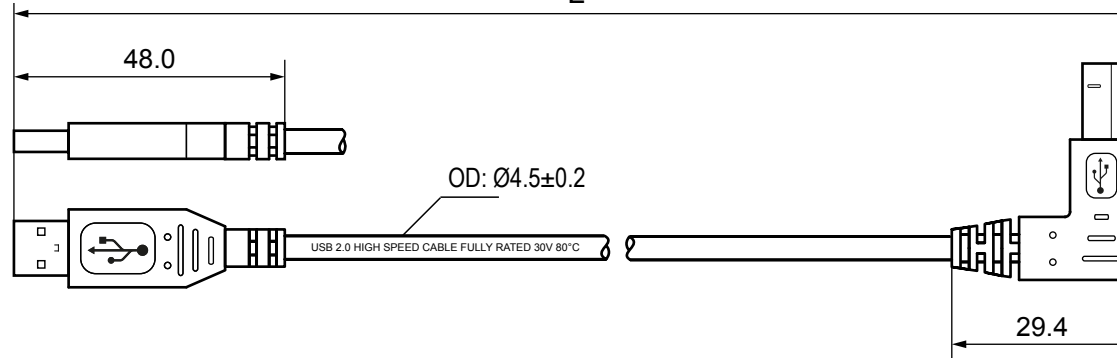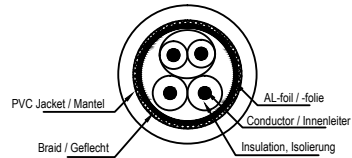

D

E

F



Nr. / No.	Länge / Length (m)
68733	3.00
24733	3.00 (SB)
39733	3.00 (PL)
95118	5.00

USB 2.0 Hi-Speed Kabel

- USB-A Stecker > USB-B 90° Winkelstecker
- USB Standard: High Speed USB 2.0
- Innenleiter: 2xAWG 26 + 2xAWG 28 Kupfer
- Isolierung: PVC
- Schirmung: doppelt
- Datenrate: max. 480 Mbit/s

- RoHS-konform

USB 2.0 Hi-Speed cable

- USB-A plug > USB-B 90° angled plug
- USB Standard: High Speed USB 2.0
- Inner conductor: 2xAWG 26 + 2xAWG 28 copper
- Insulation: PVC
- Shielding: double
- Data rate: max. 480 Mbps

- RoHS compliant

H

I

Änderungen

Datum	Name	gez.:	Datum	Name
20.03.2015	tf	gez.:	04.11.2011	tf
28.05.2018	tf	gepr.:	04.11.2011	tf
		Norm.:		

Änderungen vorbehalten / subject to change

Bezeichnung

USB AB 90° HiSpeed 2.0



Blatt

Zeichnungs-Nr.:

von

J

1 2 3 4 5 6 7 8 9 10 11 12 13 14