

KS 0.6 μm Au (BG)

KS-050 E08

Item KS-050E08



ingun[®]

Partner for Future Technology

INGUN SELECTION



1:1

KS 0.6 μm Au (BG)

KS-050 E08

Item KS-050E08




ingun[®]

Partner for Future Technology

General data

| | |
|-------------------------------|-------------------------|
| Product group | Receptacles (KS) |
| Series | KS-050 |
| Sub-series | KS-050 press-in version |
| Type of receptacle connection | Plug / open |
| Press ring | Yes |
| Surface area | Gold |
| Collar diameter | 1.05 mm [.041 in] |
| Collar height | 7.9 mm [.311 in] |
| Knurl | No |
| Vacuum-tight | No |
| RoHS-compliant | Yes |

INGUN SELECTION

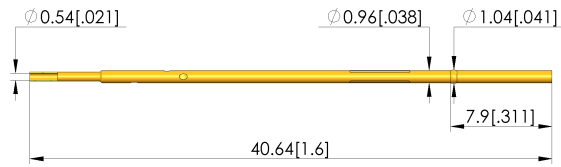

Mounting hole

| | |
|---------------------------------------|---------------------------------|
| Mounting hole in CEM1 | 0.98 - 1.00 mm [.038 - .039 in] |
| Mounting hole in FR4 | 0.98 - 1.00 mm [.038 - .039 in] |
| Mounting hole with press ring in CEM1 | 0.98 - 1.00 mm [.038 - .039 in] |
| Mounting hole with press ring in FR4 | 0.98 - 1.00 mm [.038 - .039 in] |

Mechanical data

| | |
|----------------|-------------------|
| Total length | 40.6 mm [1.59 in] |
| Outer diameter | 0.95 mm [.037 in] |

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/22 EN

Weitere Informationen zum Thema
Test probes



RECEPTACLES