
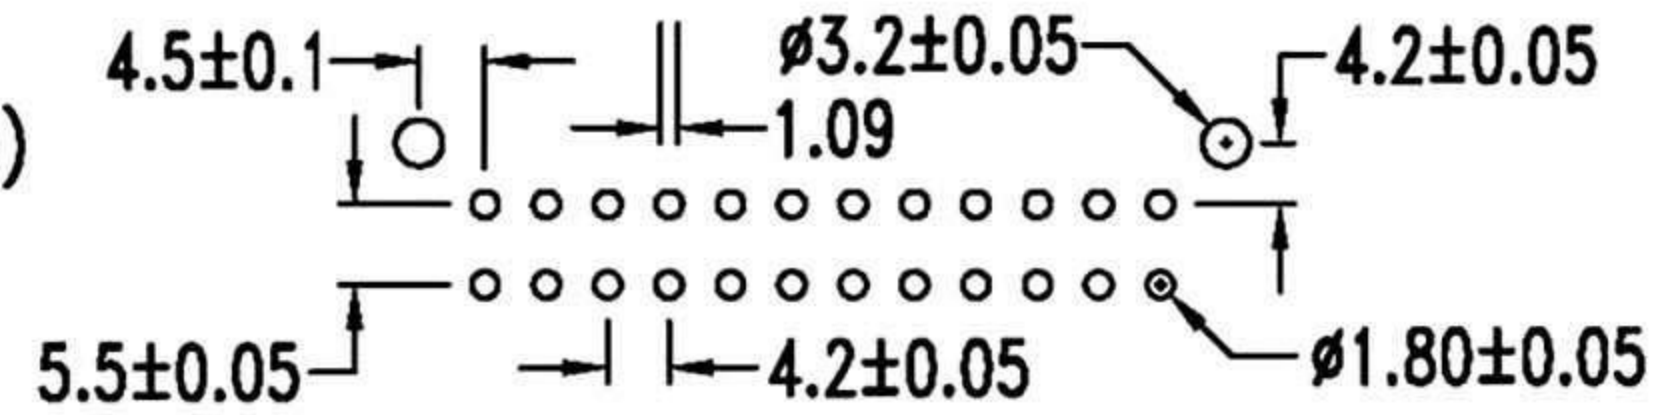


**Features:**

- 2 ~ 24 circuits available
- Material: UL 94V-2
- Positive housing locks
- 600V volts rating
- Current rating up to 9 amperes per circuits
- 10 milliohms contact resistance
- Recommended PCB thickness: .07"(1.78mm) max.

**Specifications:**

- Voltage rating: 600V AC, DC (R.M.S.)
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40 °C ~ 105 °C  
(including temperature rise)

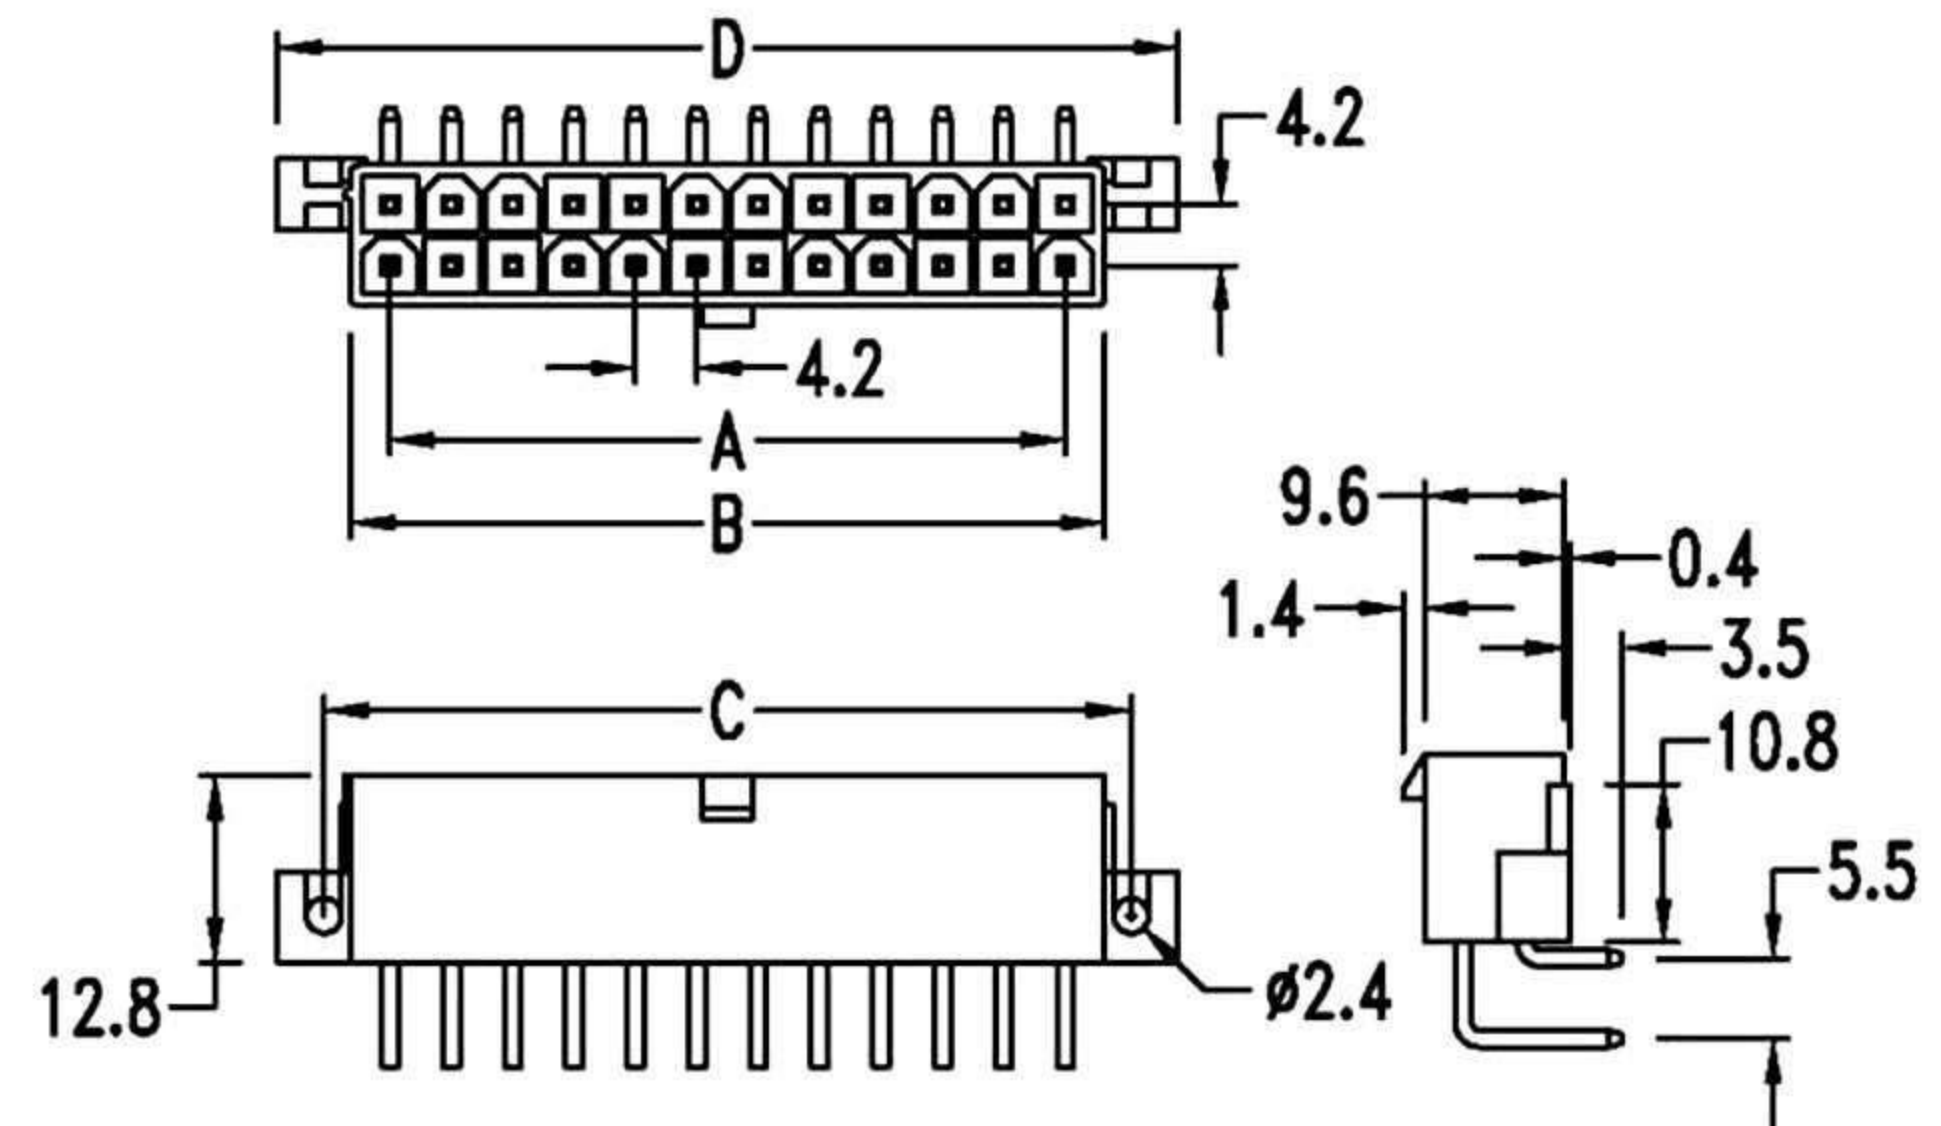

**Ordering and Dimensional Information ( mm )**

Circuits	Dim. A	Dim. B	Dim. C	Dim. D	Circuits	Dim. A	Dim. B	Dim. C	Dim. D
2		5.4	9.0	15.4	14	25.2	30.6	34.2	40.6
4	4.2	9.6	13.2	19.6	16	29.4	34.8	38.4	44.8
6	8.4	13.8	17.4	23.8	18	33.6	39.0	42.6	49.0
8	12.6	18.0	21.6	28.0	20	37.8	43.2	46.8	53.2
10	16.8	22.2	25.8	32.2	22	42.0	47.4	51.0	57.4
12	21.0	26.4	30.0	36.4	24	46.2	51.6	55.2	61.6

P. C. B . hole dimensions

<p>RoHS Compliant</p>		<p><b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.</p>	
<p>APPD. 核准 <i>Elaine</i></p>	<p>SCALE 比例 参考</p>	<p>TOLERANCE 容許公差 .000 ± 0.08 .00 ± 0.25 .0 ± 0.40</p>	<p>PART NAME 品名 4.2mm WAFER RIGHT ANGLE TYPE WITH EAR W/O PLOARIZING PEG TIN PLATED WHITE COLOR ROHS LOW-LEAD</p>
<p>DWG. 製圖 <i>Jolin</i></p>	<p>UNIT 單位 MM</p>	<p>SIZE 紙張尺寸 A 4</p>	<p>PART NO. 料號 W4505-XXPDRCTWR</p>
<p>DATE 制表日 2006/10/30</p>	<p>PAGE 張數 1 OF 1</p>	<p>REV. 版本 A</p>	