


Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

The information provided herein is from CONNPLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNPLY or its affiliates. Unauthorized use or reproduction of any part of this document, in any form or by any means, without the prior written permission of CONNPLY is strictly prohibited. CONNPLY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/09/05'		LJC 05/09/05'
B	DRAWING UPDATE	JLZ 11/06/17'		

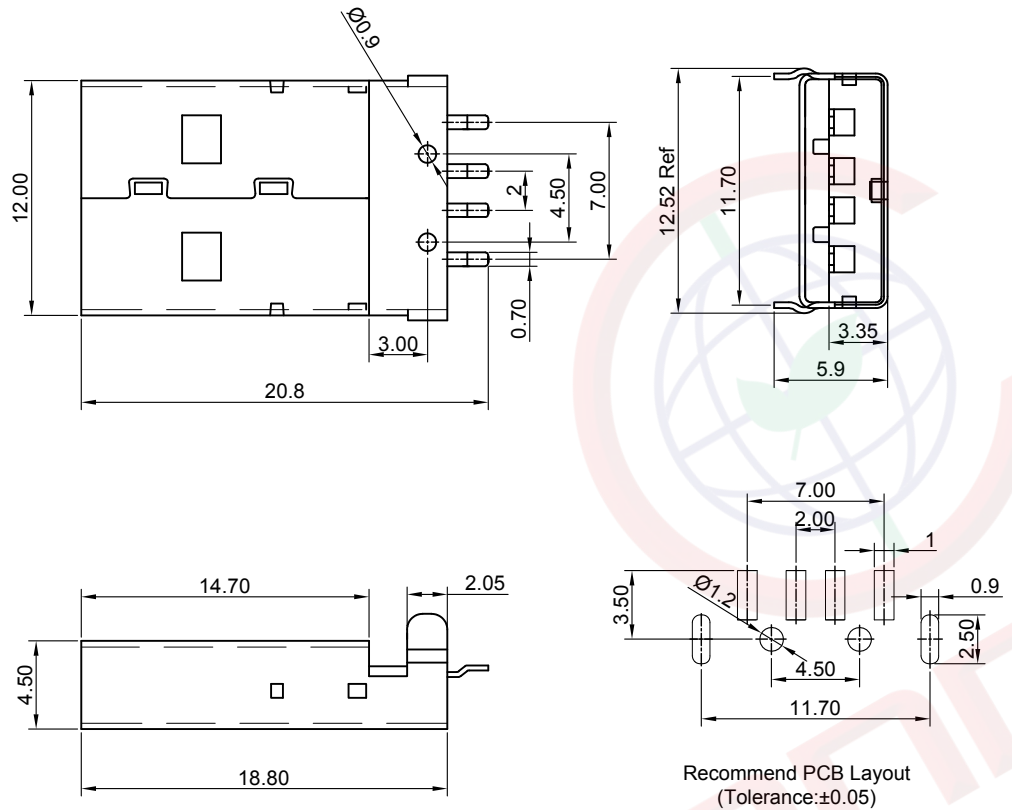

- NOTES:
- Specifications:
 - 1.1 Contact resistance:30mΩ max.
 - 1.2 Insulation resistance:1000MΩ min.
 - 1.3 Current rating:1.5A.
 - 1.4 Voltage rating:30VDC.
 - 1.5 Dielectric withstanding voltage:AC 500V for 1 minute.
 - Materials:
 - 2.1 Housing: High temp (UL94 V-0).
 - 2.2 Contact:Copper alloy
 - 2.3 Shell:Steel
 - Product number code:

DS1098 - X X X

 - Contact plating
 - 0: Selective Gold Flash
 - 03: Selective Gold 3u"
 - 30: Selective Gold 30u"
 - Shell plating
 - N: Nickel
 - 6: Tin
 - Color of housing:
 - W: White
 - B: Black
 - Series No. DS1098 series

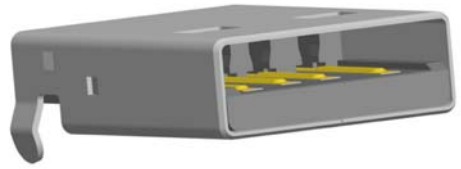

(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	USB A TYPE MALE SMT TYPE	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1098 SERIES
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNPLY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1098-XXX-B					