

Verbatim LED "Trumpet" Downlight 220mm 20W/30W 3000K 2100lm/3200lm White

- Luminous efficacy of up to 107lm/W
- 50,000 hours lifetime (L85B10) / 70,000 hours lifetime (L80B10)
- Light output of 2100/3200lm
- 3000K warm white light
- Flicker-free
- DALI option available
- UGR<19
- 5 Years Warranty



Product Number 52939

General Data

| | |
|-------------------|-------------------------------|
| Installation Type | Recessed |
| Housing material | Aluminium & PBT |
| Housing colour | white - RAL9003 |
| Protection class | IP40 |
| Dimmable | Yes with optional DALI driver |

Geometric Data

| | |
|---------------------|------|
| Height (mm) | 121 |
| Outer diameter (mm) | 220 |
| Inner diameter (mm) | 205 |
| Weight (g) | 1040 |

Electric Data

| | |
|--------------------------|-----------|
| Wattage (W) | 20/30 |
| Voltage (V) | 220-240 |
| Current (mA) | 950 |
| Power Factor | 0.9 |
| Operating Frequency (Hz) | 50/60 |
| Safety Class | Class III |
| Power supply | External |

Photometric Data

| | |
|--------------------------|-----------|
| Luminous Flux (lm) | 2100/3200 |
| CRI | 80 |
| CCT (K) | 3000 |
| Luminous Efficacy (lm/W) | 105/107 |
| Luminous Intensity (cd) | 2100/3200 |
| Beam Angle (°) | 65 |
| UGR | 17/18.4 |

Lifespan

| | |
|-----------------|---------|
| Lifetime (hrs) | 70,000 |
| Switching Cycle | 100,000 |

Mechanical Parameters


| | |
|----------------|-------|
| Glow wire test | 850°C |
|----------------|-------|



Product image




Technical drawing

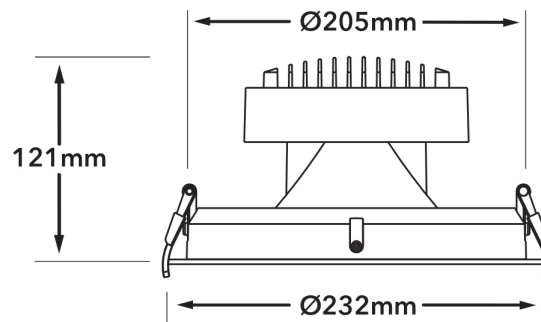


Application image




Energy Rating



This luminaire contains built-in LED lamps.





} LED

The lamps cannot be changed in the luminaire.

Verbatim 52939
874/2012

Technical Packaging Details

EAN 128
 (02)00023942529392(37)01(91)814

EAN 14
 50023942529397

Pack Dimensions(HxWxL)
 250 x 250 x 155 (mm)

MOQ
 1

Carton Dimensions (HxWxL)
 1019 x 1140 x 760 (mm)

Cartons/Pallet
 72

Layers/Pallet
 6

Units/Pallet
 72

