

REV. 版次	ECN.NO. ECN. 编号	REVISE.NO. 处数	REVISER 修订者	APPD. 核准
R1	DRAWING			



A

B

C

D

E

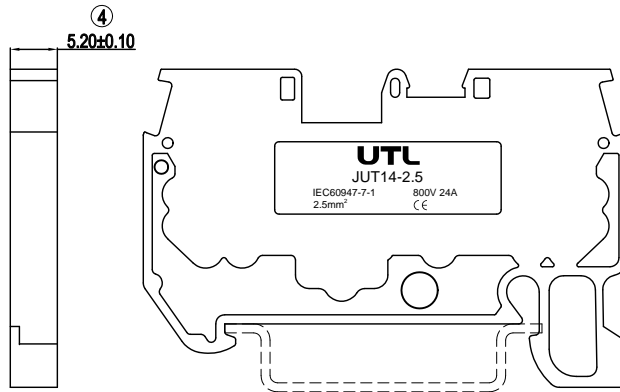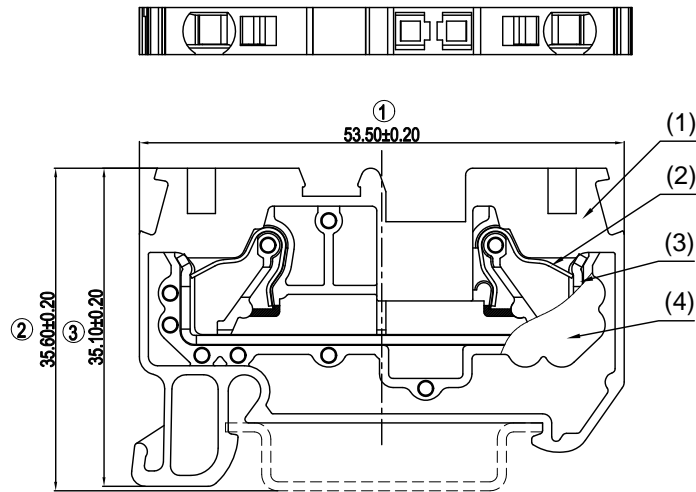

Technical Data

Material:

Body:PA66 UL94 V-0.

Conductor:Copper , Tin Plated.

Spring:SUS 301.

Electrical:

Voltage rating/Current rating:IEC 800V/24 A;

UL 600V/20 A

Contact resistance:20 mΩ Max.

Insulation resistance:1000V, 1000 MΩ Min.




Withstanding Voltage:AC 4000 V, 1 minute.

Mechanical:

Connection Capacity:24-14AWG.

Stripping Length :10mm.

Operating temperature:-45° C to +105° C.

		ZHEJIANG UTILITY ELECTRICAL CO., LTD 浙江尤提乐电气有限公司		
		TYPE NO. 型号: JUT14-2.5	TITLE: 名称:	
>120 ±0.50		APPD. 核准:	DWG. NO.: 图号: C-DW1995-0	
>30~120 ±0.30		CHKD. 审核:	SCALE: FULL PAGE: 1/1 比例: 页码:	
>6~30 ±0.20	ANGLE ±1°	DR. 设计:	UNIT: mm[inch] REV.: R1 单位: 版次:	
0~6 ±0.10				
MAT'L 材质:				