
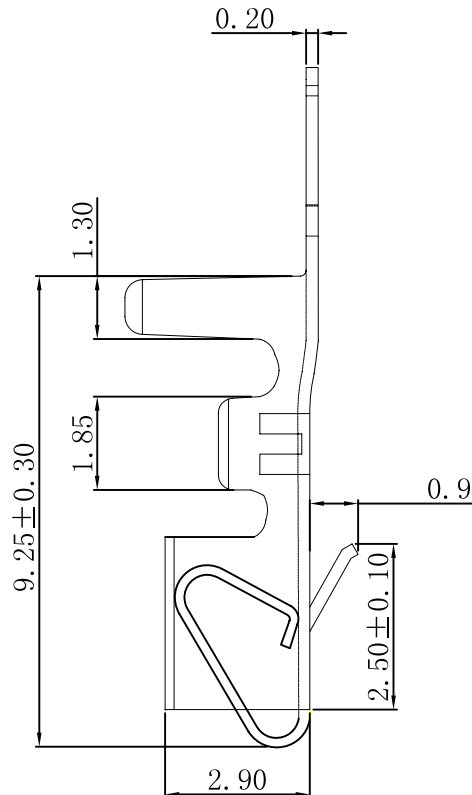


RoHS

REVISION DATE		
ITEM	DESCRIPTION	
A.0	Issue	2013 07 17

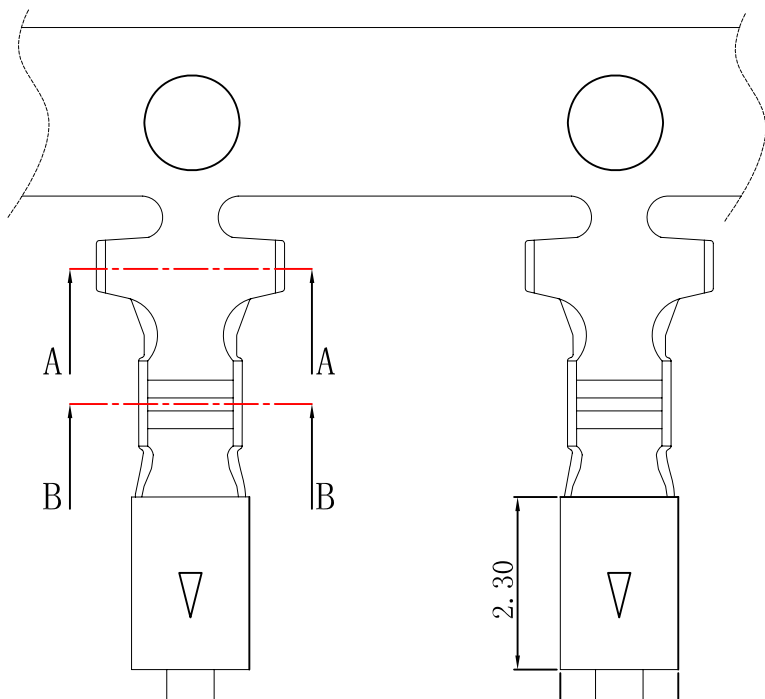


■ SPECIFICATIONS


- Voltage rating: 250V AC/DC
- Current rating: 3.0A AC/DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 500mΩ Min.
- Temperature range: -25°C - +85°C
- Contact resistance: 10mΩ Max.

■ TERMINAL


- Part No.: JVT6503TP-SNX
- Material: Phosphor Bronze
- Thickness: 0.20mm
- Finish: Tin-plated
- Applicable wires: AWG# 22~26
- Q'ty: 5500 pcs/reel



SEC:A-A



SEC:B-B

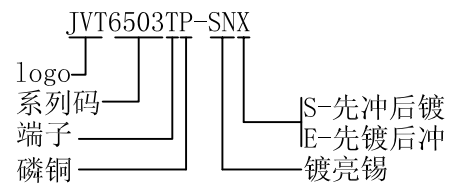

投影 (PROJECT)		公差 (TOLERANCE)
单位 (UNIT)	mm	0 ± 0.40
比例 (SCALE)	1:1	0.0 ± 0.30
版本 (EDITION)	A.0	0.00 ± 0.20
日期 (DATE)	2013 07 17	0.000 ± 0.05

东莞市乔业电子有限公司  
DONG GUAN CHYAO YEE (JVT) CONNECTORS CO., LTD.

绘图 (DRAWN)	YongJun	品号 (PART NO)	JVT6503TP-SNX	页次 (PAGE)
审核 (CHECKED)		图号 (DRAW NO)	048-6503-01	1/1
核准 (APPROVE)		品名 (NAME)	SMP 2.50mm Female TER	