


9111 Series

H.D. 2.0mm(0.079") Futurebus(+)4 Rows Male Straight Type

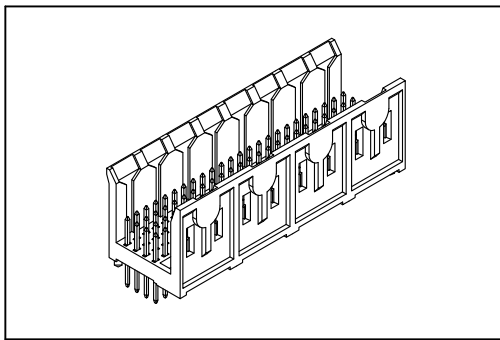

Material:



Housing: High Temperature Plastic UL94V-0.
Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 1 A.
Dielectric Withstanding Voltage: AC 1000V.
Insulator Resistance: 1000MΩ min.
Contact Resistance: 30mΩ max.
Operating Temperature: -65°C ~+125°C.



Features:

- * 2mm high density futurebus+ male solder and press fit type.
- * Available pin count from 24~192.
- * Side by side stackable.
- * Various solder tail length options.
- * Push-Fit peg.

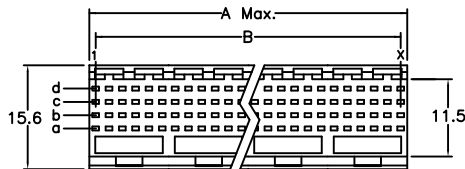


Dip Type

Press Fit Type

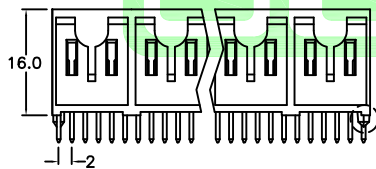

Option-A

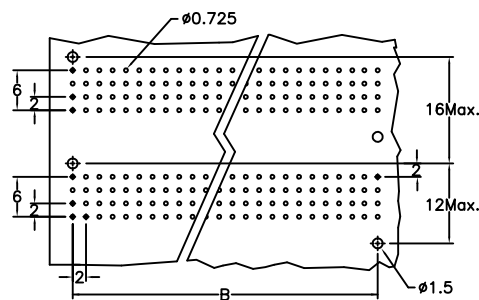

P.C. Board Layout

Position	Dimension	
	A	B
24	11.95	10
48	23.95	22
72	35.95	34
96	47.95	46
120	59.95	58
144	71.95	70
168	83.95	82
192	95.95	94

Ordering Information

9111-	<u>4</u>	<u>1</u>	<u>24</u>	<u>A</u>	<u>C</u>	<u>10</u>	<u>D</u>	<u>U</u>
Series	4: 4Rows	1: Male Signal	Position	A: A ~ V See Page CB01	C: Dip Tin Contact Gold G: Gold	10: 10μ" 30: 30μ"	D: Dip Type P: Press Fit Type	U: Tube Package