


# Specification Sheet

Max Interrupt Voltage: 130 Vac  
 Max Operating Voltage: 60 Vdc  
 Maximum Interrupt Current: 20 A

Insulating Material:  
 meets UL94 V-0 Requirements

Lead-free, RoHS compliant

Lead Material:  
 Tin plated copper, 0.6 Dia.

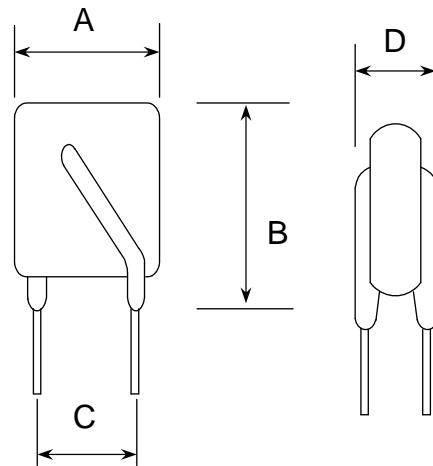

F1

TABLE I. DIMENSIONS:

	A	B	C	D	LEAD
	MAX	MAX	TYP	MAX	TYP
mm	9.6	17.4	5.1±0.5	3.8	F1

TABLE II. PERFORMANCE RATINGS:

Model	$V_{max}$ (Vac)	$I_{max}$ (A)	$I_{hold}$ @25°C (A)	$I_{trip}$ @25°C (A)	Maximum Time To Trip		Resistance	
					Current (A)	Time (Sec)	Ri min (Ω)	Ri max (Ω)
Bp250-130	130	20	0.25	0.50	0.75	20.0	1.90	3.80