


Specification Sheet

Max Interrupt Voltage: 130 Vac
 Max Operating Voltage: 60 Vdc
 Maximum Interrupt Current: 20 A

Insulating Material:
 meets UL94 V-0 Requirements

Lead-free, RoHS compliant

Lead Material:
 Tin plated copper, 0.6 Dia.

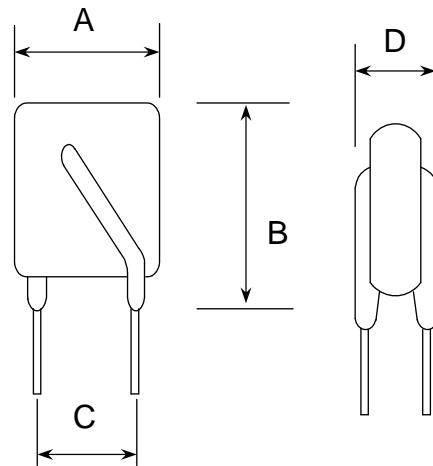

F1

TABLE I. DIMENSIONS:

	A	B	C	D	LEAD
	MAX	MAX	TYP	MAX	TYP
mm	11.4	16.5	5.1±0.5	3.8	F1

TABLE II. PERFORMANCE RATINGS:

Model	V_{max} (Vac)	I_{max} (A)	I_{hold} @25°C (A)	I_{trip} @25°C (A)	Maximum Time To Trip		Resistance	
					Current (A)	Time (Sec)	Ri min (Ω)	Ri max (Ω)
Bp300-130	130	20	0.30	0.60	0.90	20.0	1.30	2.60

Recognition: UL Approved

