



LED HIGHBAY LIGHT

PRODUCT CHARACTERISTICS

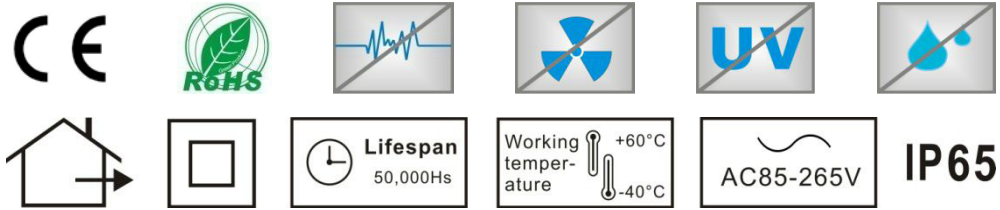

PICTURE

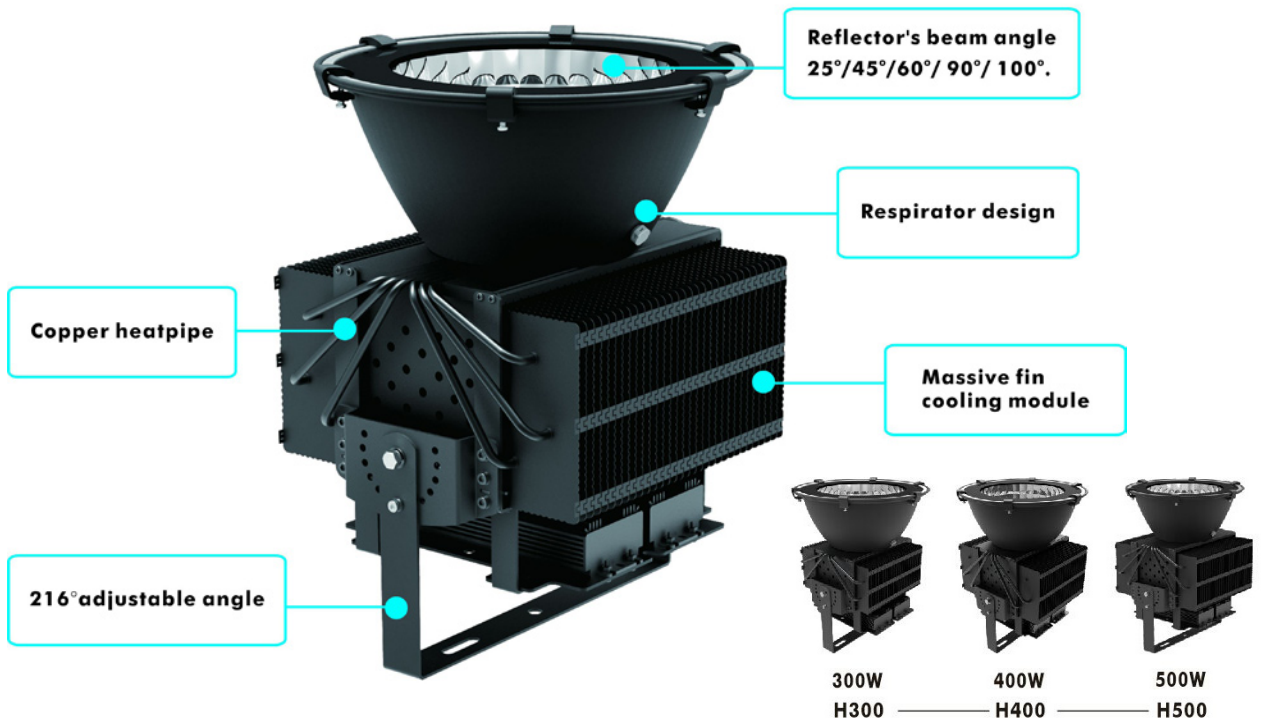


FEATURES

216° adjustable angle



Respirator design



Copper heatpipe



High reflective rate



- Full waterproof design
- World Top class LED driver Inside, PF>0.95
- New safe design, 100% safe, no danger
- Over Current, Over Voltage, Over Heat, Thunder Protection
- Complying with CE, ROHS, No strobing during working, Fast response
- Lifespan is over 50000 hours

APPLICATIONS

Pathway lighting, Park Lighting, Signboard Lighting, Special for 10-20m work shop

PRODUCT CHARACTERISTICS


Parameter \ Symbol	OLI.HB.BN.300Wah	OLI.HB.BN.400Wah	OLI.HB.BN.500Wah
Input voltage	AC100V~305V 50/60HZ		
Power factor	0.95	0.95	0.95
System consumption [W]	300	400	500
Luminous flux [lm]	27000	32000	45000
LED quantity [pcs]	160	220	220
LED model	CREE XTE	CREE XTE	CREE XTE
CRI	>80		
Color temperature	PW *		
Dimensions	φ374*459mm	φ374*497mm	φ374*497mm
Luminous efficiency [lm/w]	>90		
Power efficiency	>88%		
Main material	Aluminum		
LED Power	MW HLG-150H-36A*2	MW HLG-240H-42A*2	MW HLG-240H-42A*2
Beam angle	60° *		
Lifespan [hrs]	>50000		
IP Rating	IP65		

Attentions:

All data is under 60° beam angle and PW color temperature unless otherwise specified.

* Other color temperatures/beam angles available on request

CONNECTWIRE

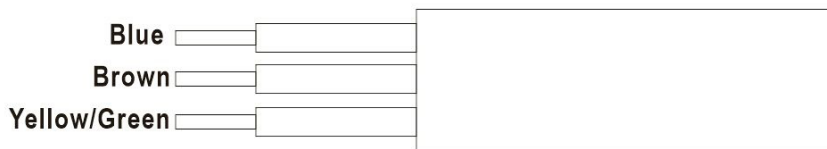

Blue - Neutral
Brown - Line
Yellow/Green - Ground

