

- Cadmium - free contacts • Height 15,7 mm
- 5000 V / 10 mm reinforced insulation
- For PCB and plug-in sockets
- Accessories: sockets and modules
- **AC and DC coils - standard (RM87N, RM87L, RM87P), DC coils - sensitive (RM87N sensitive)**
- Recyclable packing
- Recognitions, certifications, directives: RoHS,

Contact data

Number and type of contacts		1 C/O, 1 NO
Contact material		AgNi , AgNi/Au 5 µm, AgSnO ₂
Max. switching voltage	AC/DC	400 V / 300 V
Min. switching voltage		5 V AgNi, 5 V AgNi/Au 5 µm, 10 V AgSnO ₂
Rated load	AC1	12 A / 250 V AC standard version 10 A / 250 V AC sensitive version
	DC1	12 A / 24 V DC standard version 10 A / 24 V DC sensitive version
Min. switching current		5 mA AgNi, 2 mA AgNi/Au 5 µm, 10 mA AgSnO ₂
Max. inrush current		25 A AgSnO ₂ standard version 20 A AgSnO ₂ sensitive version
Rated current		12 A standard version 10 A sensitive version
Max. breaking capacity	AC1	3 000 VA standard version 2 500 VA sensitive version
Min. breaking capacity		0,3 W AgNi, 0,05 W AgNi/Au 5 µm, 1 W AgSnO ₂
Contact resistance		≤ 100 mΩ
Max. operating frequency		
	AC1	600 cycles/hour 72 000 cycles/hour

Coil data

Rated voltage	50/60 Hz AC	12...240 V standard version
	DC	3...110 V standard version 5...48 V sensitive version
Must release voltage		AC: ≥ 0,15 U _n DC: ≥ 0,1 U _n
Operating range of supply voltage		see Tables 1, 3 and Fig. 5, 7 standard version
		see Table 2 and Fig. 6 sensitive version
Rated power consumption	AC	0,75 VA standard version
	DC	0,4...0,48 W standard version 0,25 W sensitive version

Insulation

Insulation category	C250 / B400	
Insulation rated voltage	400 V AC	
Rated surge voltage	4 000 V AC	
Overvoltage category	III PN-EN 60664-1	
Insulation pollution degree	3	
Dielectric strength		
	• between coil and contacts • contact clearance	5 000 V AC 1 000 V AC
Contact - coil distance		
	• clearance	≥ 10 mm
	• creepage	≥ 10 mm

General data

Operating time (typical value)	7 ms	
Release time (typical value)	3 ms	
Electrical life	• resistive AC1	> 10 ⁵ 12 A, 250 V AC standard version > 1,7 x 10 ⁵ 10 A, 250 V AC sensitive version
	• cos φ	see Fig. 2
	• L/R=40 ms	> 10 ⁵ 0,15 A, 220 V DC
Mechanical life (cycles)	> 3 x 10 ⁷	
Dimensions (L x W x H)	29 x 12,7 x 15,7 mm	
Weight	14 g	
Ambient temperature	• storage	-40...+85 °C
	• operating	AC: -40...+70 °C DC: -40...+85 °C
Cover protection category	IP 40 or IP 67	
Environmental protection	RTII PN-EN 116000-3	
Shock resistance	30 g	
Vibration resistance	10 g 10...150 Hz	
Solder bath temperature	max. 270 °C	
Soldering time	max. 5 s	

The data in bold type pertain to the standard versions of the relays.

Coil data - standard DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance $\pm 10\%$ at 20 °C Ω	Coil operating range at 20 °C V DC	
			min.	max.
1003	3	22	2,1	7,6
1005	5	60	3,5	12,7
1006	6	90	4,2	15,3
1009	9	200	6,3	22,9
1012	12	360	8,4	30,6
1018	18	710	12,6	45,9
1024	24	1 440	16,8	61,2
1036	36	3 140	25,2	91,8
1048	48	5 700	33,6	122,4
1060	60	7 500	42,0	153,0
1110	110	25 200	77,0	280,0

The data in bold type pertain to the standard versions of the relays.

Coil data - sensitive DC voltage version (only for RM87N)

Table 2

Coil code	Rated voltage V DC	Coil resistance $\pm 10\%$ at 20 °C Ω	Coil operating range at 20 °C V DC	
			min.	max.
S005	5	102	3,75	15,0
S006	6	144	4,50	18,0
S009	9	330	6,75	27,0
S010	10	400	7,50	30,0
S012	12	580	9,00	36,0
S018	18	1 300	13,50	54,0
S024	24	2 300	18,00	72,0
S048	48	9 340	36,00	144,0


Coil data - AC 50/60 Hz voltage version

Table 3


Coil code	Rated voltage V AC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range at 20 °C V AC - 50 Hz	
				min.	max.
5012	12	100	$\pm 10\%$	9,6	13,2
5024	24	400	$\pm 10\%$	19,2	28,8
5048	48	1 550	$\pm 10\%$	38,4	57,6
5060	60	2 600	$\pm 10\%$	48,0	72,0
5110	110	8 900	$\pm 10\%$	88,0	132,0
5115	115	9 600	$\pm 10\%$	92,0	138,0
5120	120	10 200	$\pm 10\%$	96,0	144,0
5220	220	35 500	$\pm 10\%$	176,0	264,0
5230	230	38 500	$\pm 10\%$	184,0	276,0
5240	240	42 500	$\pm 15\%$	192,0	288,0

The data in bold type pertain to the standard versions of the relays.

Dimensions

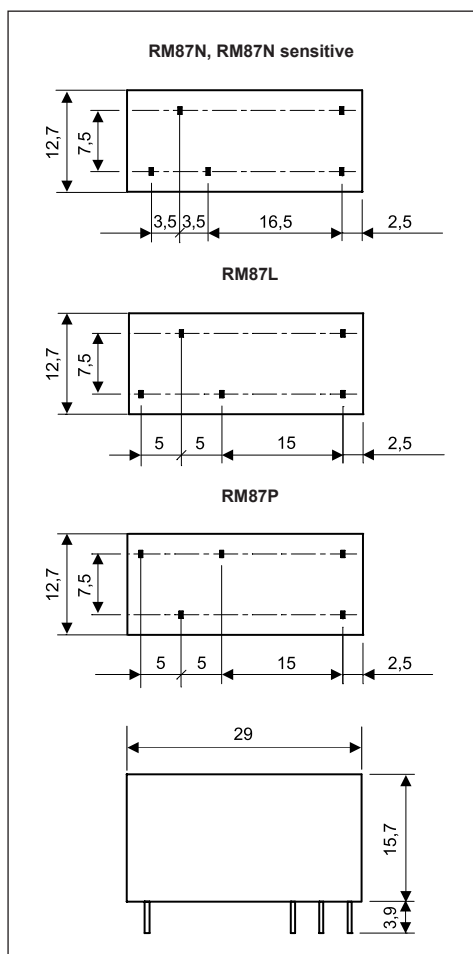


Connections diagrams (pin side view)

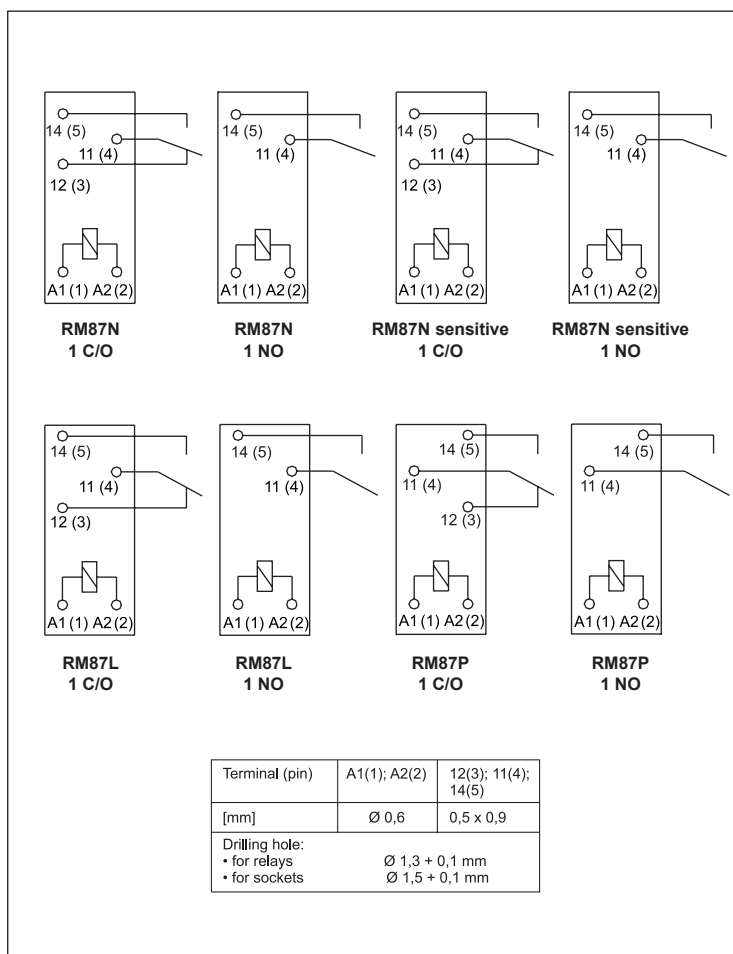


Electrical life at AC resistive load. Maximum switching frequency at rated load

Fig. 1

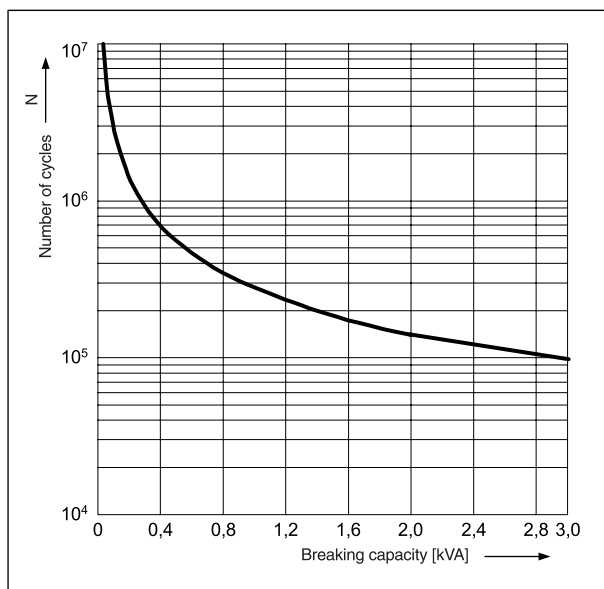


Electrical life reduction factor at AC inductive load


Fig. 2

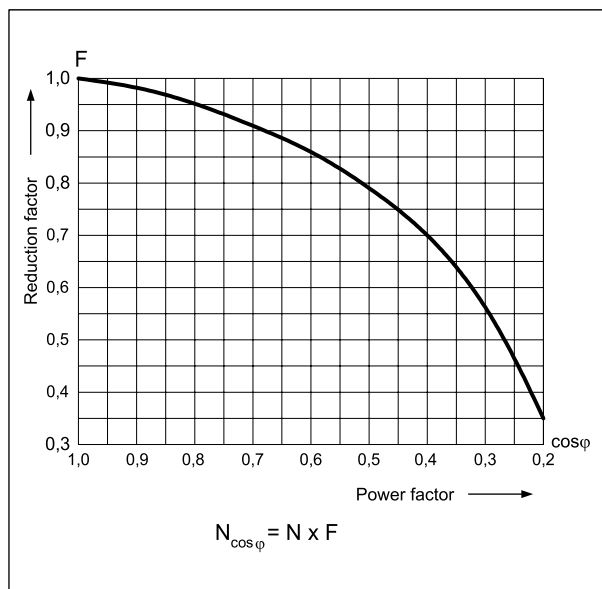


Max. DC resistive load breaking capacity - standard version Fig. 3

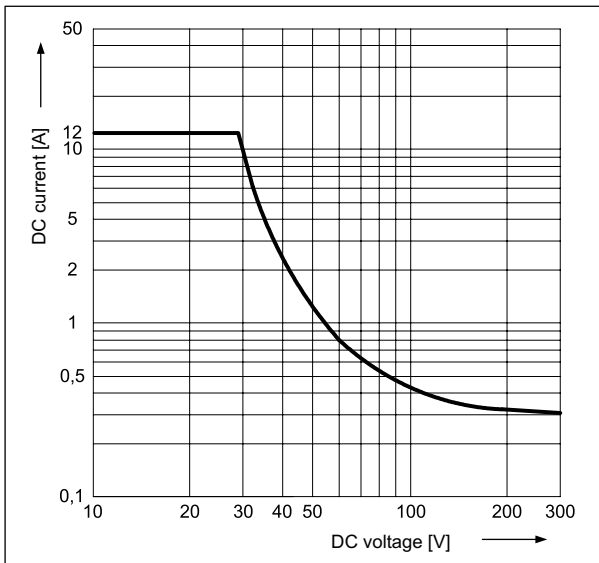


Max. DC resistive load breaking capacity - sensitive version Fig. 4

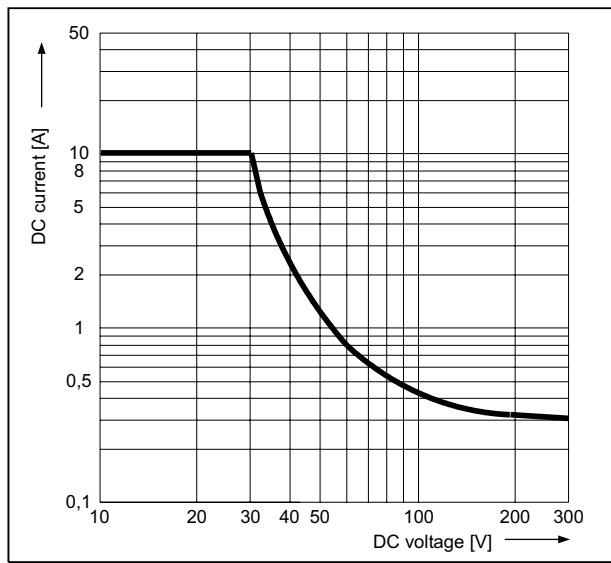


Coil operating range - DC - standard version Fig. 5

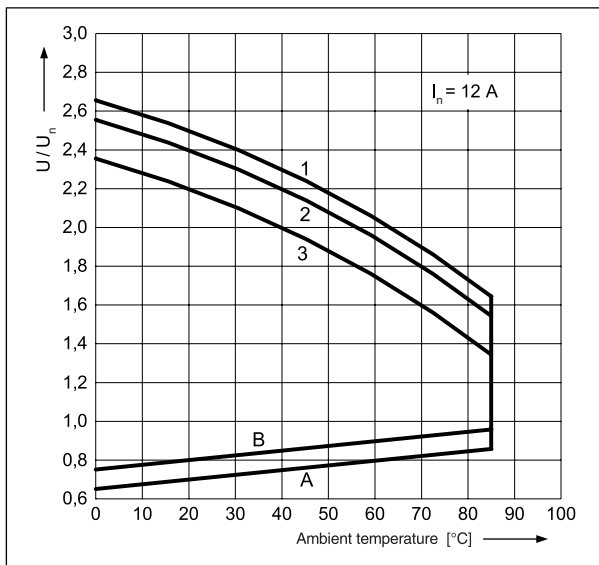

Coil operating range - DC - sensitive version Fig. 6

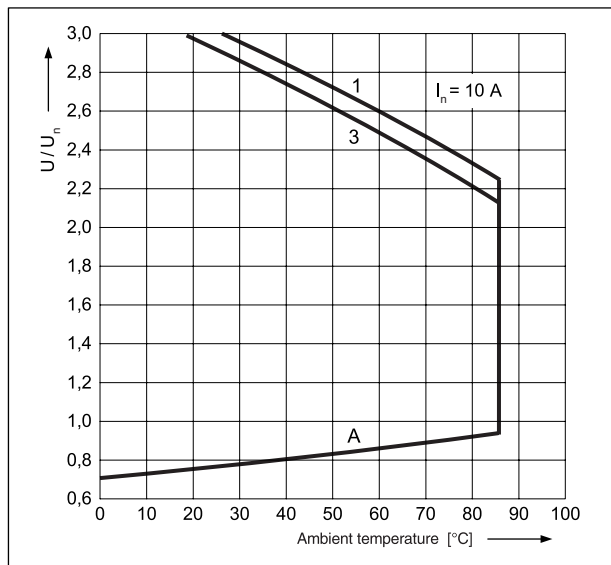


Coil operating range - AC 50 Hz Fig. 7

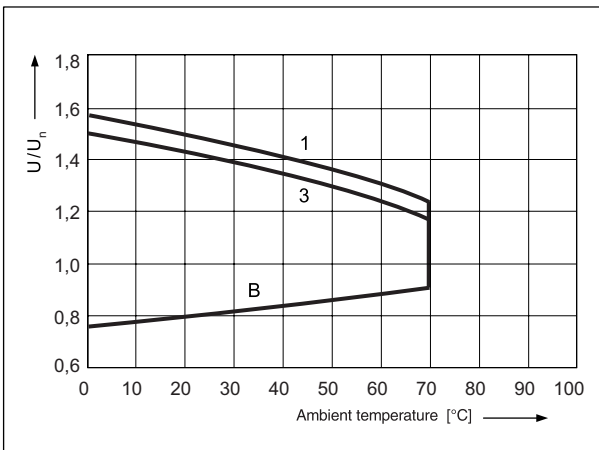

Description of Fig. 5, 6 and 7

- A** - relations between make voltage and ambient temperature at no load on contacts. Coil temperature and ambient temperature are equal before coil energizing. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).
- B** - relations between make voltage and ambient temperature after initial coil heating up with $1,1 U_n$, at continues load of I_n on contacts. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).
- 1, 2, 3** - values on Y axis represent allowed overvoltage on coil at certain ambient temperature and contact load:
 - 1** - no load
 - 2** - 50% of rated load
 - 3** - rated load

Mounting openings raster (solder side view)

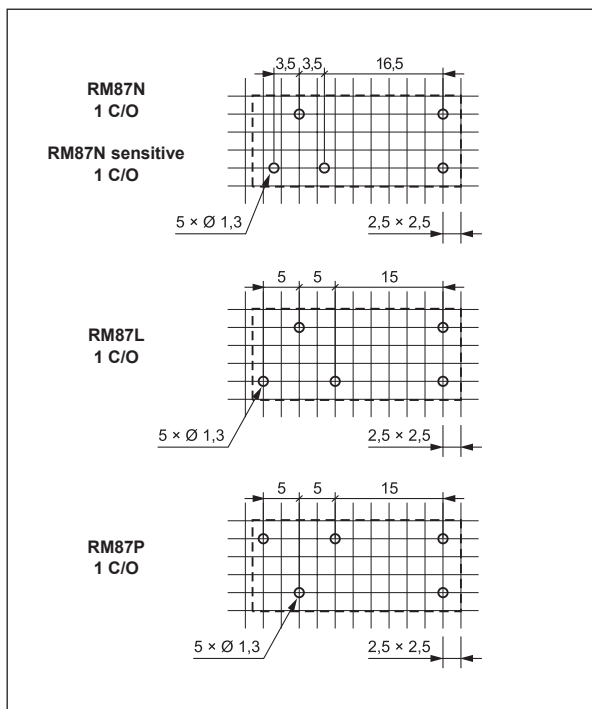

Mounting


Relays **RM87N**, **RM87N sensitive** are designed for:

- direct PCB mounting
- screw terminals plug-in sockets **GZT92** and **GZM92** with clip **GZT80-0040**, 35 mm DIN rail mount, EN 50022 or on panel mounting. Signalling / protecting modules **type M...** are available with sockets (see page 198)
- plug-in sockets for PCB mounting **EC35** with clip **MH16-2**.

Relays **RM87L**, **RM87P** are designed for:

- direct PCB mounting
- screw terminals plug-in sockets **GZT80** and **GZM80** with clip **GZT80-0040**, 35 mm DIN rail mount, EN 50022 or on panel mounting. Signalling / protecting modules **type M...** are available with sockets (see page 198)
- plug-in sockets for PCB mounting **PW80** and **EC50** with clip **MH16-2**.

Ordering codes

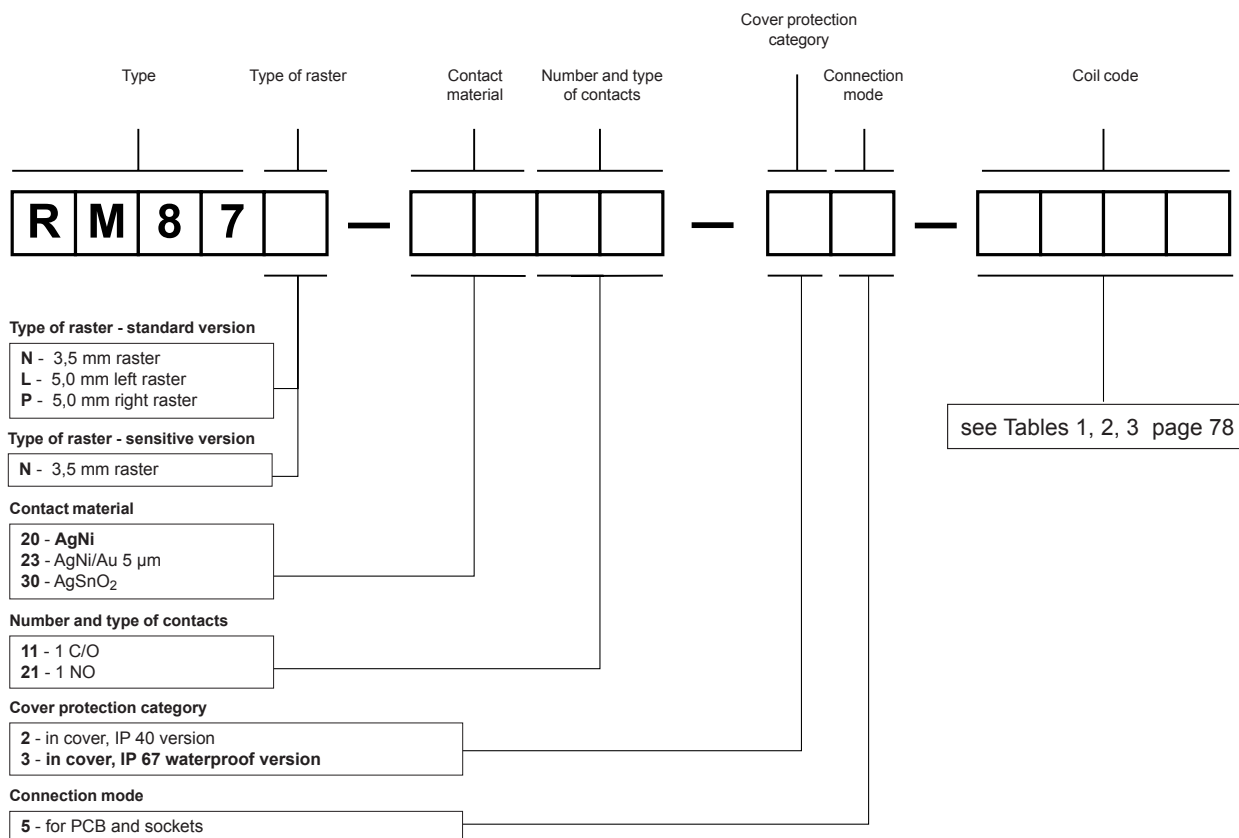

Example of ordering code:

RM87N-2011-25-1012 relay **RM87**, 3,5 mm raster, contact material AgNi, with one changeover contact, in cover IP 40, for PCB and sockets, voltage version 12 V DC