


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH11/16/05'		

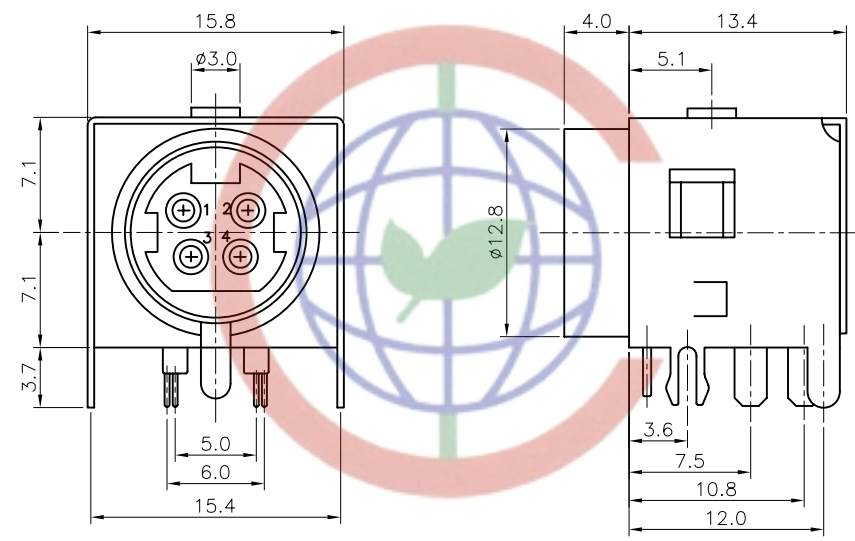


- NOTES:
- SPECIFICATIONS:
 - VOLTAGE RATING: 30V DC.
 - CONTACT CURRENT RATING: 1A MAX. PER PIN.
 - CONTACT RESISTANCE: 30 MILLIOHMS MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000 MEGAOHMS MIN.
 - OPERATING TEMPERATURE: -20°C~+80°C.
 - PRODUCT NUMBER CODE:


DS1093-05 - X X X X X

 - Shell support
 - X: W/O Shell
 - S: W/ Shell
 - Contact plating
 - 0: Selective Gold Flash
 - No. of contacts:
 - 4: 4 pin
 - 3: 3 pin
 - Shell Plating:
 - N: Nickel
 - 6: Tin
 - Color of housing:
 - B: Black
 - Series No.
 - DS1093-05

CONNFLY

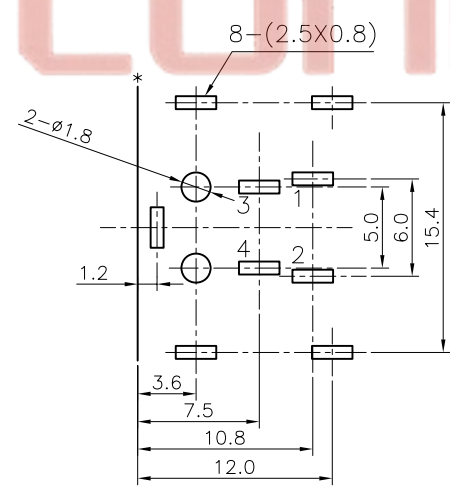


FOR 4PIN ONLY
RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

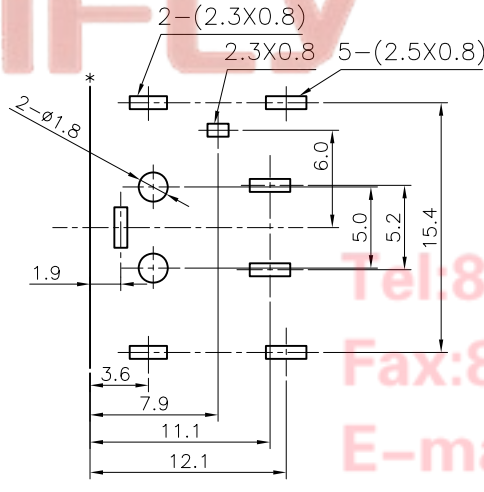

FOR 3PIN ONLY
RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

Tel: 86-574-6350878
 Fax: 86-574-6350817
 E-mail: sales@zhenqin.com.cn
 Http://www.connfly.com



GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°		MINI DIN 422 TYPE
.X	±0.38	.X	±3°	UNITS	mm
.XX	±0.25	.XX	±2°	SHEET SIZE	A4
DRAWING TYPE				CUSTOMER	
SCALE				1:1 SHEET 1 OF 1	
DRAWING NO.				C-DS1093-05-XXXXX	

CONNFLY 晨翔电子有限公司
CONNFLY ELECTRONIC CO. LTD