






RoHS

REVISION DATE		
ITEM	DESCRIPTION	DATE
A	Issue	

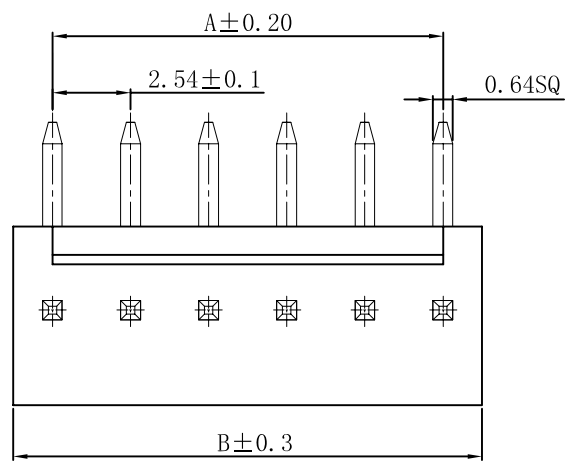

- SPECIFICATION
- Voltage rating: 250V AC, DC
 - Current Rating: 3A, AC, DC
 - Withstand voltage: 1000V AC/minute
 - Contact resistance: 20mΩ max
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C ~ +85° C

- WAFER
- Material: Base: Nylon 66 UL94V-0
pin: Brass Tin-plated

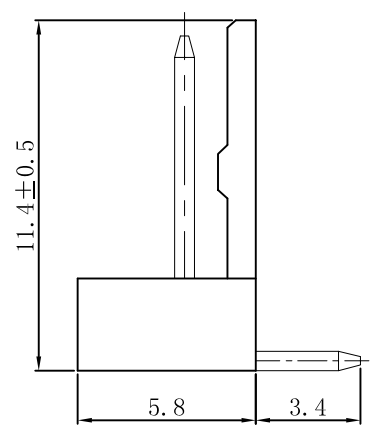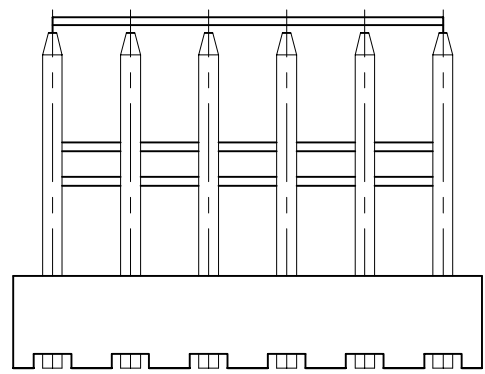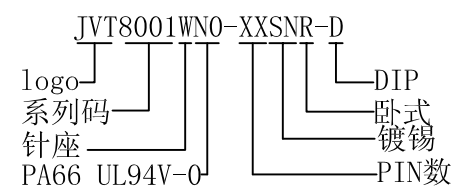

Poles	DIM		Poles	DIM	
	A	B		A	B
2	2.54	5.08	10	22.86	25.40
3	5.08	7.62	11	25.40	27.94
4	7.62	10.16	12	27.94	30.48
5	10.16	12.70	13	30.48	33.02
6	12.70	15.24	14	33.02	35.56
7	15.24	17.78	15	35.56	38.10
8	17.78	20.32	16	38.10	40.64
9	20.32	22.86	20	48.26	50.80

投影 (PROJECT)		公差 (TOLERANCE)
单位 (UNIT)	mm	0 ± 0.40
比例 (SCALE)	FIT	0.0 ± 0.30
版本 (EDITION)	A	0.00 ± 0.20
日期 (DATE)	2013 05 13	0.000 ± 0.05

东莞市乔业电子有限公司
DONG GUAN CHYAO YEE (JVT) CONNECTORS CO., LTD.

绘图 (DRAWN)	TONY
审核 (CHECKED)	CHEN
核准 (APPROVE)	

品号 (PART NO)	JVT8001WNO-XXSNR-D	页次 (PAGE)	
图号 (DRAW NO)	005-8001-02		1/1
品名 (NAME)	MOLEX2510 2.54mm 90° WAFER		