

P/N: W7166-XXPSGB00R








P/N: W7166-XXPRGB00R

NOTES

- * Poles:2-18
- * Material:Insulator:PBT UL94V-0 BLACK
- * Contact:0.64mm(.025") square pin,brass,gold plated

Specifications

- * Current rating: 2.5A AC, DC
- * Voltage rating: 250V AC, DC
- * Temperature range: -25°C~+85°C
- * Insulation resistance: 1,000MΩ min.
- * Withstand voltage: 600 AC/minute
- * Applicable PC board thickness: .063" (1.6mm)
- * Endure under max. 240°C 5SECS.

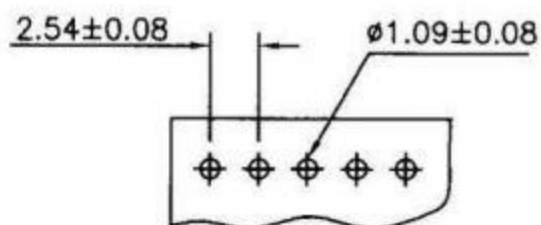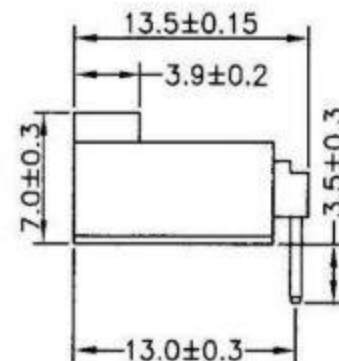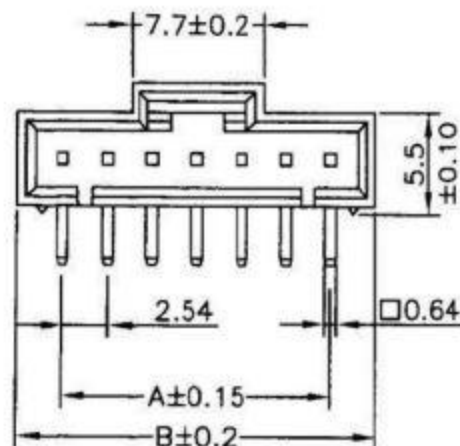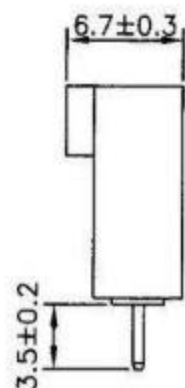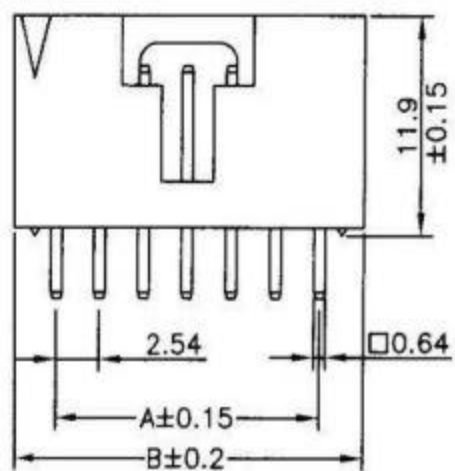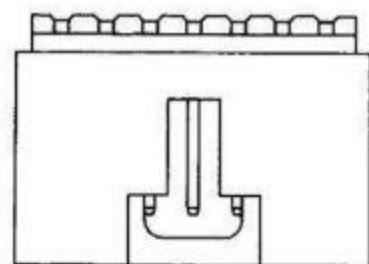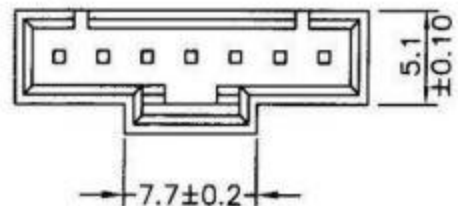

P.C. Board Layout

CIRCUITS	DIMENSION mm	
	A	B
2	2.54	7.62
3	5.08	10.16
4	7.62	12.70
5	10.16	15.24
6	12.70	17.78
7	15.24	20.32
8	17.78	22.86
9	20.32	25.40
10	22.86	27.94
11	25.40	30.48
12	27.94	33.02
13	30.48	35.56
14	33.02	38.10
15	35.56	40.64
16	38.10	43.18
17	40.64	45.72
18	43.18	48.26