



TABLE:

REV.	ECN NO.	DESCRIPTION	DATE	CHANGE
A0	——	整理图面发行	2017.05.11	Xuli

防尘帽图示

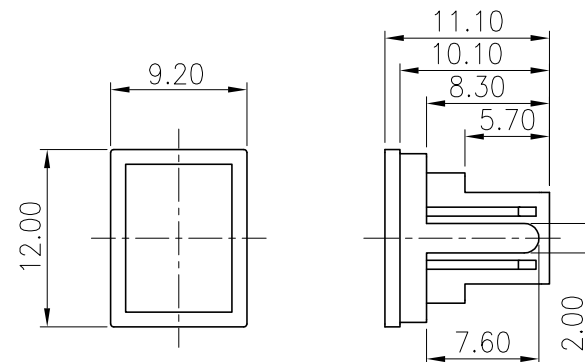

加带防尘帽图示

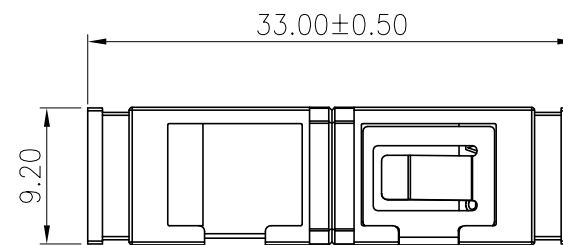

NOTE:

Features:

- Standards of IEC,EIA/TIA,Telcordia
- Repeatability: ≥ 500
- Insertion loss: $\leq 0.2\text{dB}$
- Interchangeability: $\leq 0.2\text{dB}$
- Repeatability: $\leq 0.2\text{dB}$
- Working temperature: $-40^{\circ}\text{C}\sim+75^{\circ}\text{C}$
- Storage Temperature: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$
- High Reliability and Stability
- Precision mechanical dimensions

Material

- Housing: Engineering plastics
Color SEE TABLE
- Sleeve : Zirconia ceramic

10790100W012	SC/PC长耳适配器(无弹片)两片式防尘帽	PBT 2184C Blue	PBT Black
10790300W032	SC/APC长耳适配器(带弹片)两片式防尘帽	PBT DOC520008 Green	PBT Black
10790300W023	SC/APC长耳适配器(带弹片)两片式防尘帽	PBT 7737C Green	PBT Black
10790100W026	SC/PC 长耳适配器(带弹片)两片式防尘帽	PBT Blue_DOC620010	PBT Black
10790100Y003	SC/PC 长耳适配器(带弹片)两片式防尘帽	PBT Blue 2184C	PBT Black

PART NUMBER	DESCRIPTION	Housing&Insert color	Cap color
-------------	-------------	----------------------	-----------

CZT® SUZHOU YIHUA COMMUNICATED CONNECTOR CO., LTD.

X. ± 0.35	X.* $\pm 2^*$	UNIT:	mm	DR:	shaoping	TITLE:	SC/PC 适配器(带弹片, 两端为两片式防尘帽)
.X ± 0.30	.X* $\pm 1^*$	3RD:		DE:	shaoping		
.XX ± 0.25	.XX* $\pm 0.5^*$	SCALE:	1:1	CHKD:		SHEET:	1/1
.XXX ± 0.15	.XXX* $\pm 0.5^*$	CUSTOMER DRAWING	REV:	A0	APPD:	D/N:	SZESF161207
						P/N:	SEE TABLE
						M/N:	——